

NAIL GUN TEST

FOR MODELS DCN692 / DCN695


TEST REQUIREMENTS



63MM RINGSHANK



FULLY CHARGED BATTERY



DEPTH SET TO FULL




5 x STANDARD MDF (200x200x25mm) CLAMPED



PASS



FAIL

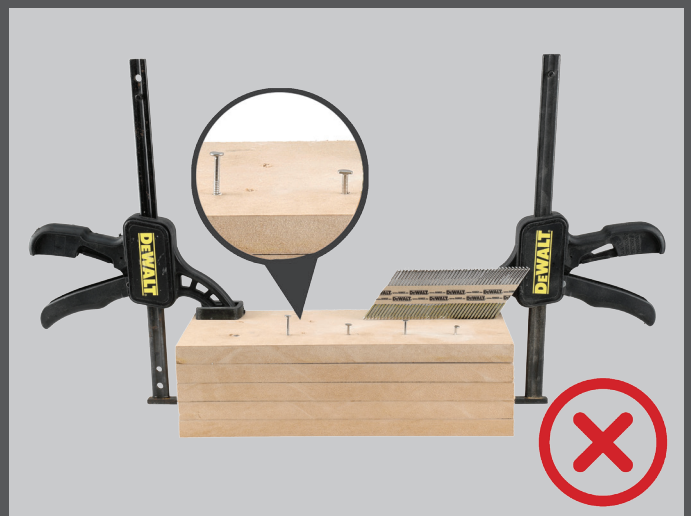

IN SINGLE SHOT MODE, DRIVE 5 NAILS INTO THE MDF

Note: MDF must be secured firmly.
Do not test in Bump Mode. All nails should be driven flush or under flush and should not stall.

NAIL GUN TEST

FOR MODELS DCN692 / DCN695


TEST REQUIREMENTS



90MM RINGSHANK



FULLY CHARGED BATTERY



DEPTH SET TO FULL



5 x STANDARD MDF (200x200x25mm) CLAMPED




PASS



ALL NAILS NEED TO BE EXACTLY THE SAME HEIGHT - THE RANGE CAN BE 30MM OR LESS

FAIL

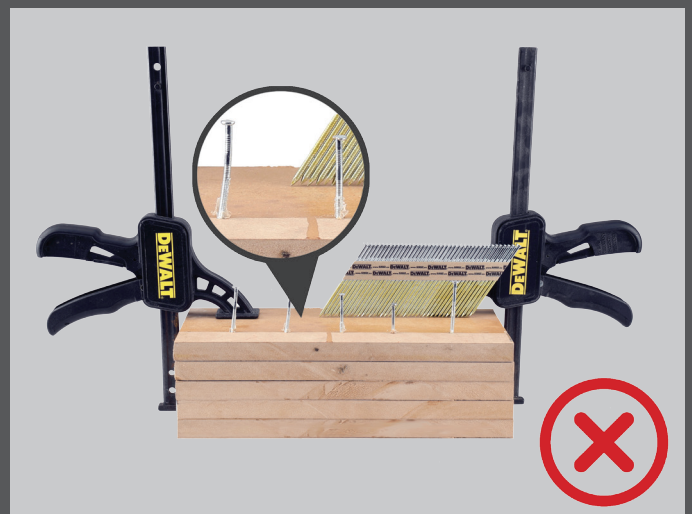

IN SINGLE SHOT MODE, DRIVE 5 NAILS INTO THE MDF

Note: MDF must be secured firmly.
Do not test in Bump Mode. All nails should be driven within 30mm from flush and will stall occasionally.